

Flat roofing anchor FDD Plus R (steel)




Application range

- > To fix roofing membranes and insulating material
- > Also for use with slope insulation
- > For concrete, lightweight concrete and aerated concrete substructures
- > To reduce thermal bridges
- > For new buildings


Properties

- > Anchor sleeve made of high-grade plastic material
- > Anchor screw made of steel, high-quality organic coating (15 Kesternich cycles, DIN 50018, 1997); Cr(VI) free

Applications



Technical specifications




Cross references

Bit hexalobular TX30
 Bit extension
 Hammer drill SDS-plus
 Hip belt flat roof

Characteristic values

Substructure	Drill hole depth	Embedment depth
Concrete \geq C12/15	\geq 45 mm	\geq 30 mm
Lightweight concrete \geq LC12/13	\geq 45 mm	\geq 30 mm
Aerated concrete \geq P 3.3/0.5	\geq 80 mm	\geq 65 mm

Certifications

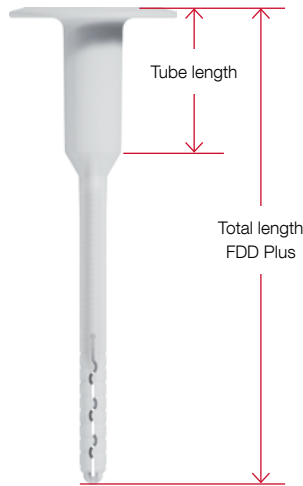

	Total length [mm]																	
	95	115	135	155	175	195	215	235	255	275	295	335	375	415	455	495	535	
22	x																	
42		x	x			x												
62				x			x											
82					x			x										
102									x									
122										x								
142											x							
162												x						
182													x					
202															x			
242																	x	
282																		x





Product online



Order description	Anchor length [mm]	Total panel thickness Substructure ¹⁾ ≤ [mm]	Total panel thickness Substructure ²⁾ ≤ [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
Anchors with steel screws finished with high-quality organic Cr(VI) free coating							
FDD-Plus-50x95-R	95	65	30	100		8720095400	4061245011097
FDD-Plus-50x115-R	115	85	50	100		8720115400	4061245011073
FDD-Plus-50x135-R	135	105	70	100		8720135400	4061245011059
FDD-Plus-50x155-R	155	125	90	100		8720155400	4061245011035
FDD-Plus-50x175-R	175	145	110	100		8720175400	4061245011011
FDD-Plus-50x195-R	195	165	130	100		8720195400	4061245010991
FDD-Plus-50x215-R	215	185	150	100		8720215400	4061245010977
FDD-Plus-50x235-R	235	205	170	100		8720235400	4061245010953
FDD-Plus-50x255-R	255	225	190	100		8720255400	4061245010939
FDD-Plus-50x275-R	275	245	210	100		8720275400	4061245010915
FDD-Plus-50x295-R	295	265	230	100		8720295400	4061245010892
FDD-Plus-50x335-R	335	305	270	100		8720335400	4061245010878
FDD-Plus-50x375-R	375	345	310	100		8720375400	4061245010854

¹⁾ Concrete C12/15; lightweight concrete LC12/13

²⁾ Aerated concrete P 3.3/0.5

Further lengths available upon request

